


HIGH EFFICIENCY
LED MULTIPURPOSE LIGHTS



TERRALITE LML[®] 126




efficiently illuminating
your way

GRAH[®]
LED LIGHTING

TECHNICAL DATA


TERRALITE LML® 126

Light source	Mid power LEDs by Lumileds
Voltage	220 – 240 V (50 – 60 Hz)
Driving current	350 mA
Power consumption	48 W
Luminaire flux	4,800 lm
Colour temperature	5000 K (3000 and 4000 K on request)
Lifetime	min. 50.000 hours
Ingress protection	IP65
Protection class	I
Temperature range	-30 to +50 °C
Operating temperature	+55 °C
Material	Housing: polycarbonate Cover: polycarbonate (other on request)
Housing colour	Grey
Dimming	DALI (on request)
Weight	2.70 kg
Product dimensions (LxWxH)	1270 mm x 140 mm x 105 mm




MOUNTING OPTIONS & LIGHT DISTRIBUTION

Mounting height: 2 - 3 m

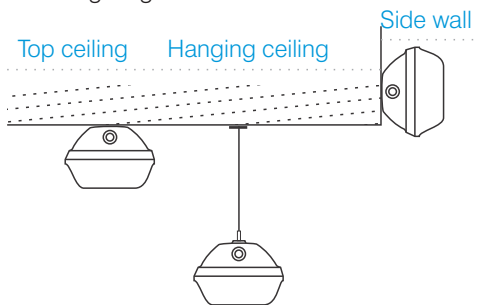

Symmetric, 4,800 lm

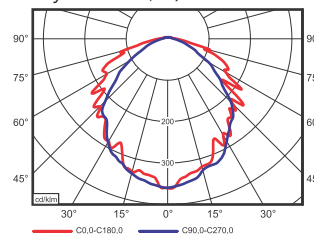

GRAH LED LIGHTING **LML 126**
LSL-126-01-F-00-XXX-NO-MP-XX-048-NO

This luminaire contains built-in LED lamps.

A⁺

A⁺

A

B

C

D

E

}

L

E

D

The lamps cannot be changed in the luminaire.

874/2012

Distributor

GRAH[®]
LED LIGHTING

www.grahlighting.com

Manufacturer reserves all rights to make changes in materials and components used in its products. All data are subject to change without prior notification.

efficiently
illuminating
your way